


WOVEN VINYL

Flooring

Inspired by the inherent strength and versatile functions of pvc material, we've redefined woven vinyl flooring. Seamlessly flexible for everyday living and ever-changing environments.

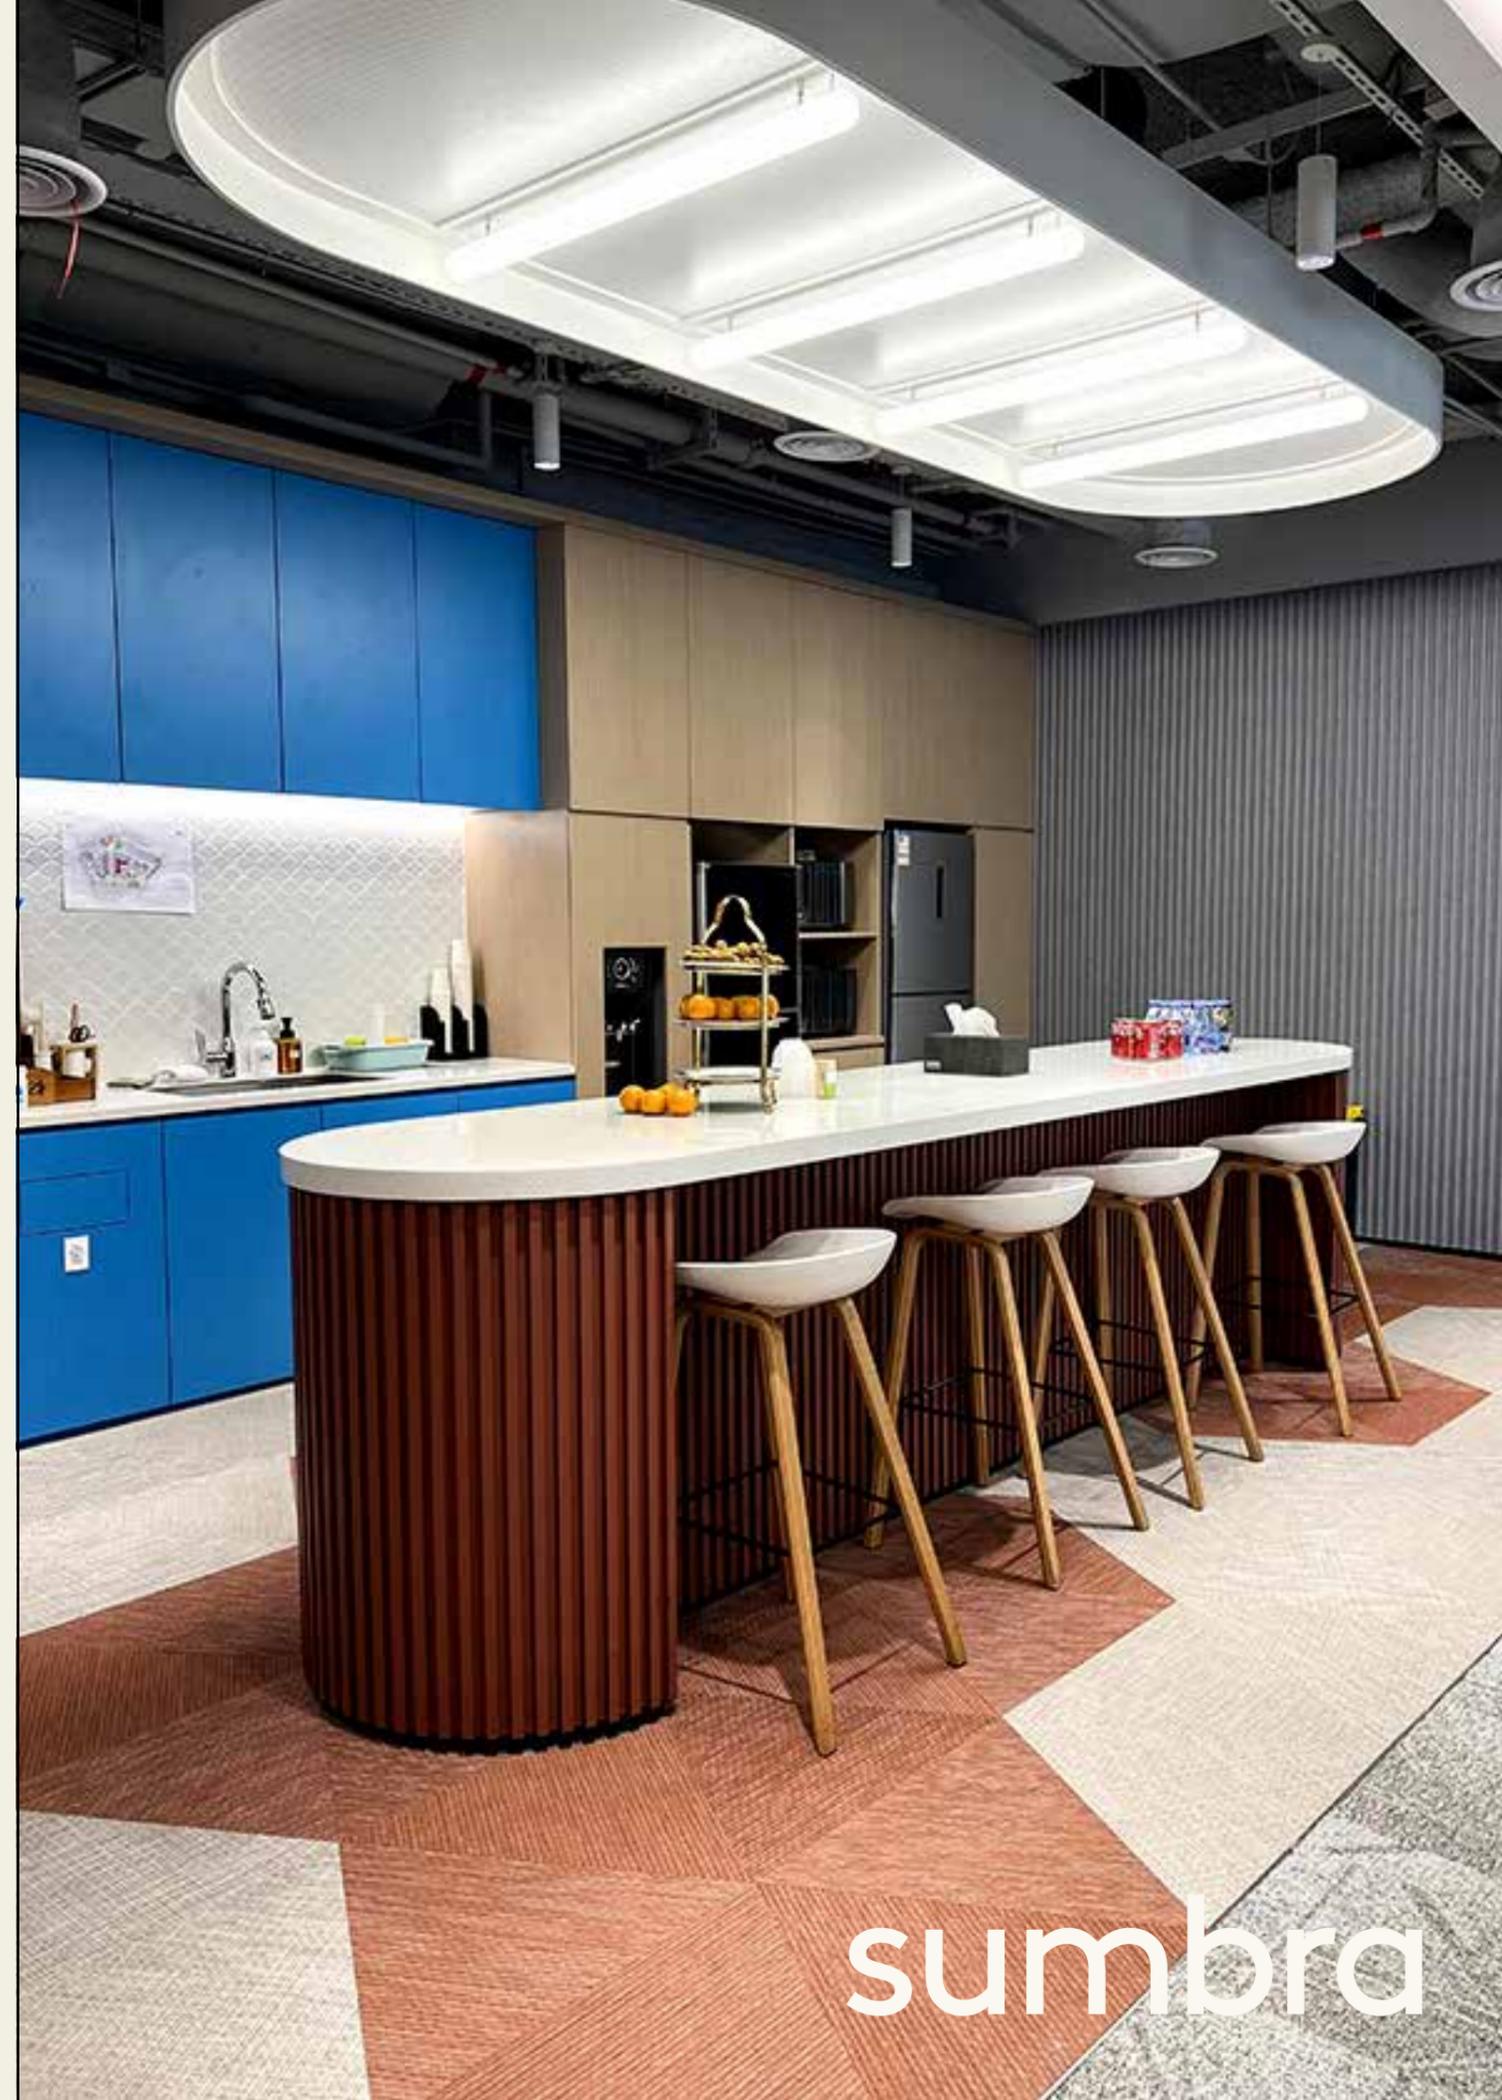

Sumbra was founded to revolutionise the flooring industry with China's top-tier woven vinyl flooring. This unique construction and textile fabric set a new standard for flooring. Today, we remain dedicated to creating products that exceed expectations and redefine the potential of pvc material to make it stronger, more beautiful, and more sustainable.

**Noble,
natural
& strong.**


Consistency,
quality &
craftsmanship.





Content

Our Brand	03
Atelier Collection	09
Classic Collection	16
Delux Collection	22
Elegant Collection	28
Fantasty Collection	34
Stairs	40
Specifications	42
Contact	44

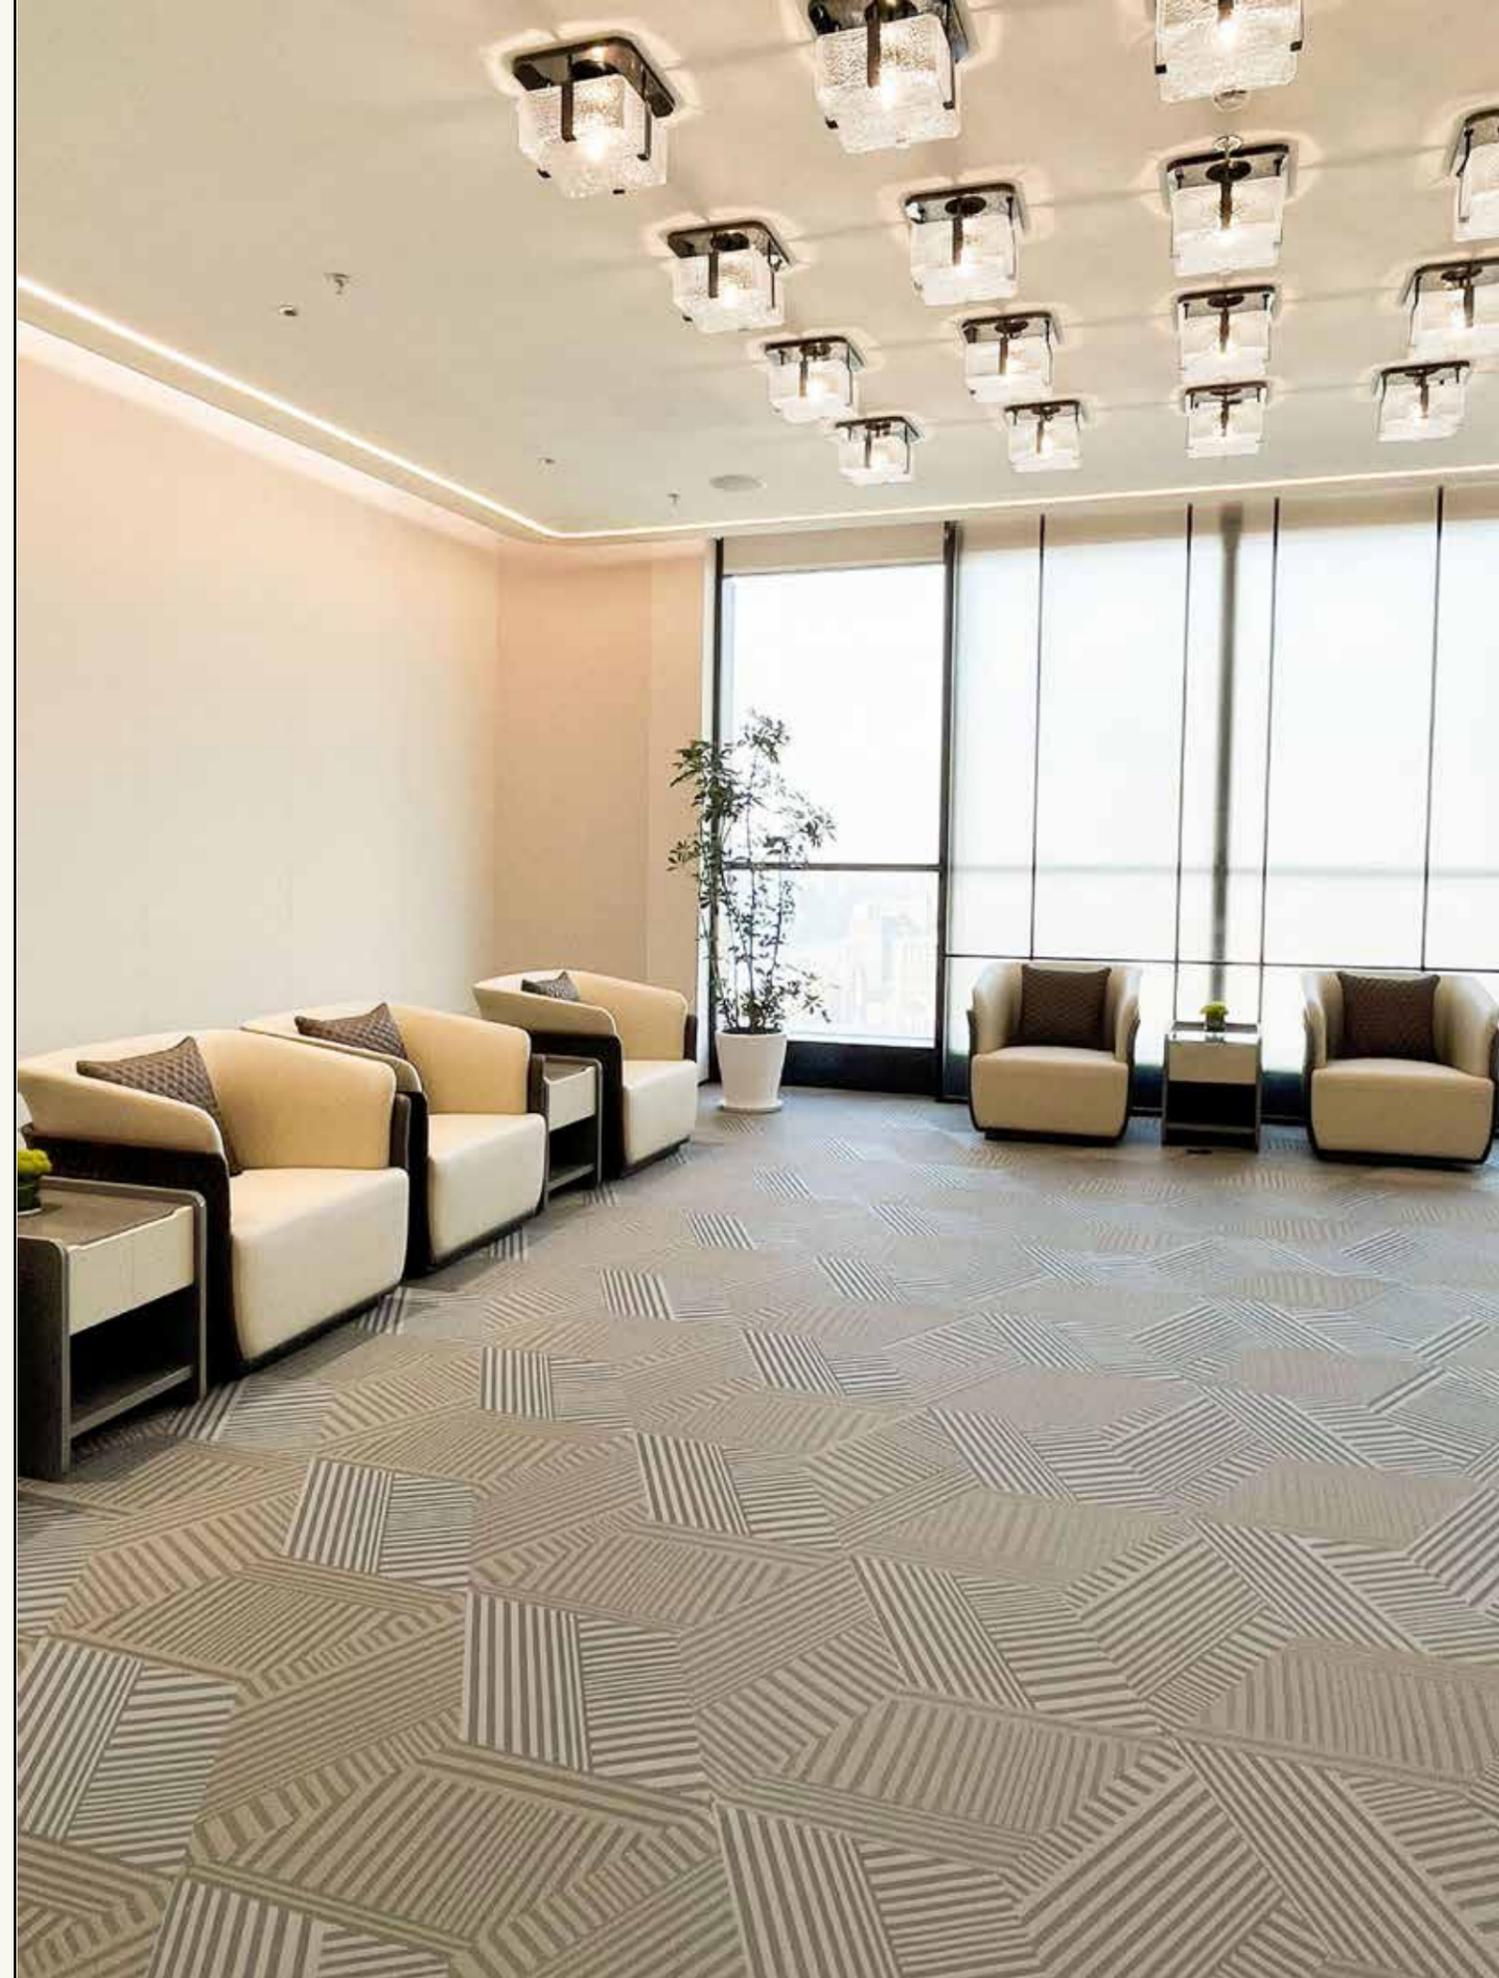

— Atelier
WOVEN COLLECTION



Atelier
101018



Atelier
101019



Atelier
101031




Atelier
101140



Atelier
101141



Atelier
101138



Atelier
101035



Atelier
101042



Atelier
101047



Atelier
101162



Atelier
101175



Atelier
101177



Atelier
101067




Atelier
101073



Atelier
101076



Atelier
101189



Atelier
101236



Atelier
101242



Atelier
101248



Atelier
101249



Atelier
101280




Atelier
101303



Atelier
106031



Atelier
106034



Atelier
106060



Atelier
106063



Atelier
108004



Atelier
108009



Atelier
108025



Atelier
108030



Atelier
108049



Atelier
108057



Atelier
108064




Atelier
108080



Classic

Classic


WOVEN COLLECTION

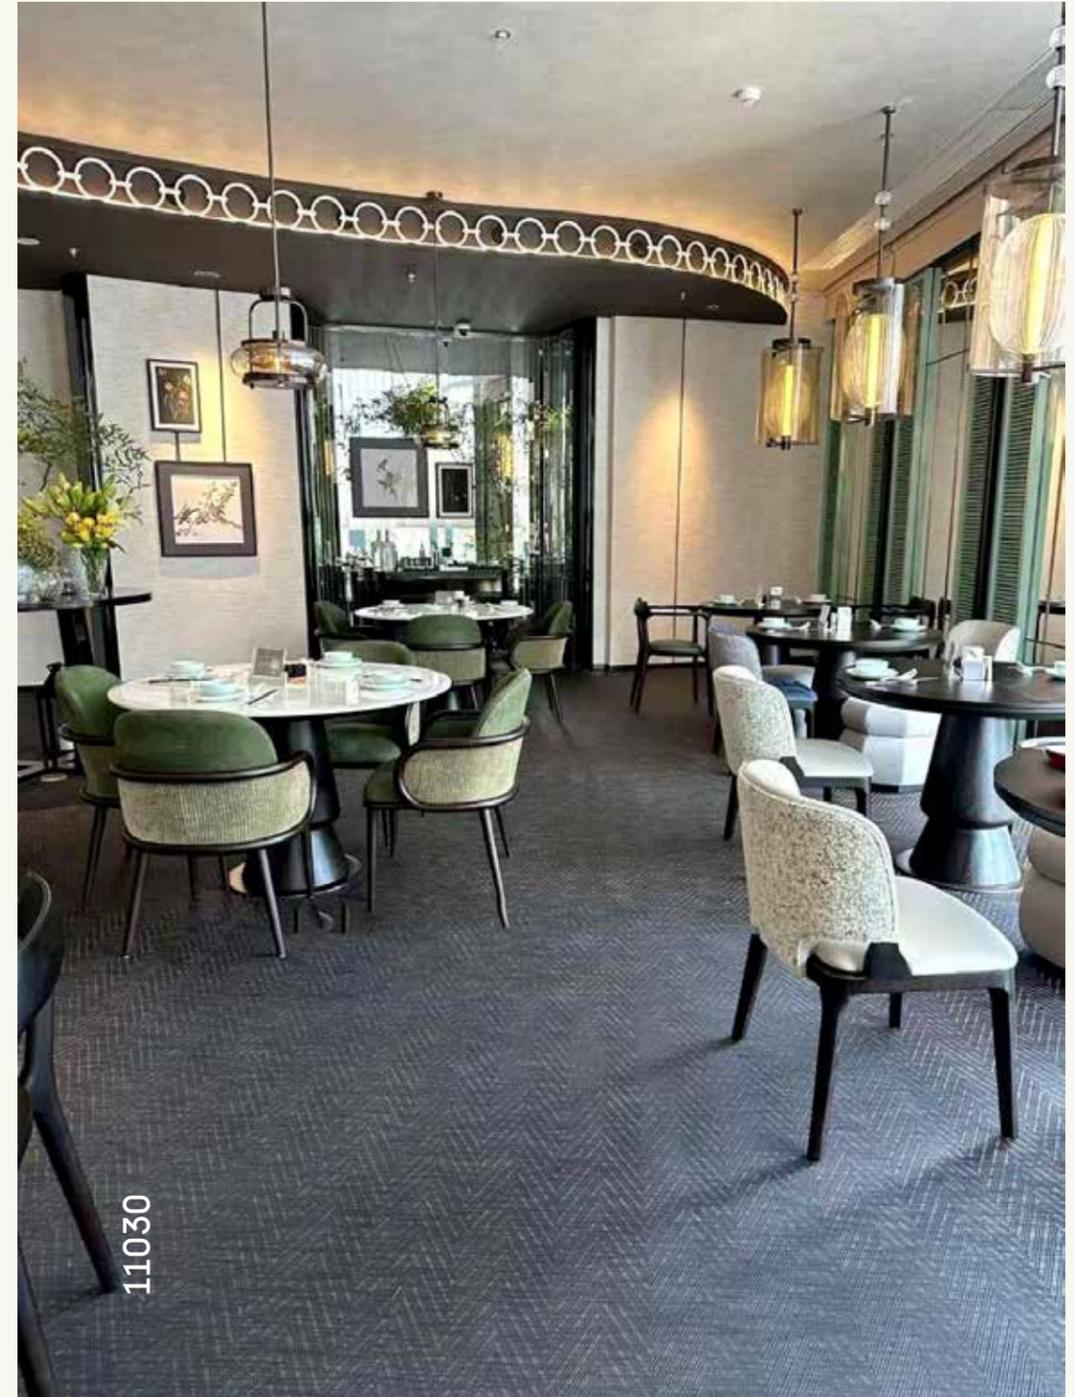

11030




Classic
11015




Classic
11030



Classic
11042



Classic
11036-2



Classic
11038



Classic
11049



Classic
11047



Classic
11007-1



Classic
11029



Classic
11049-1



Classic
11049-2





Classic
11053





— Delux
WOVEN COLLECTION

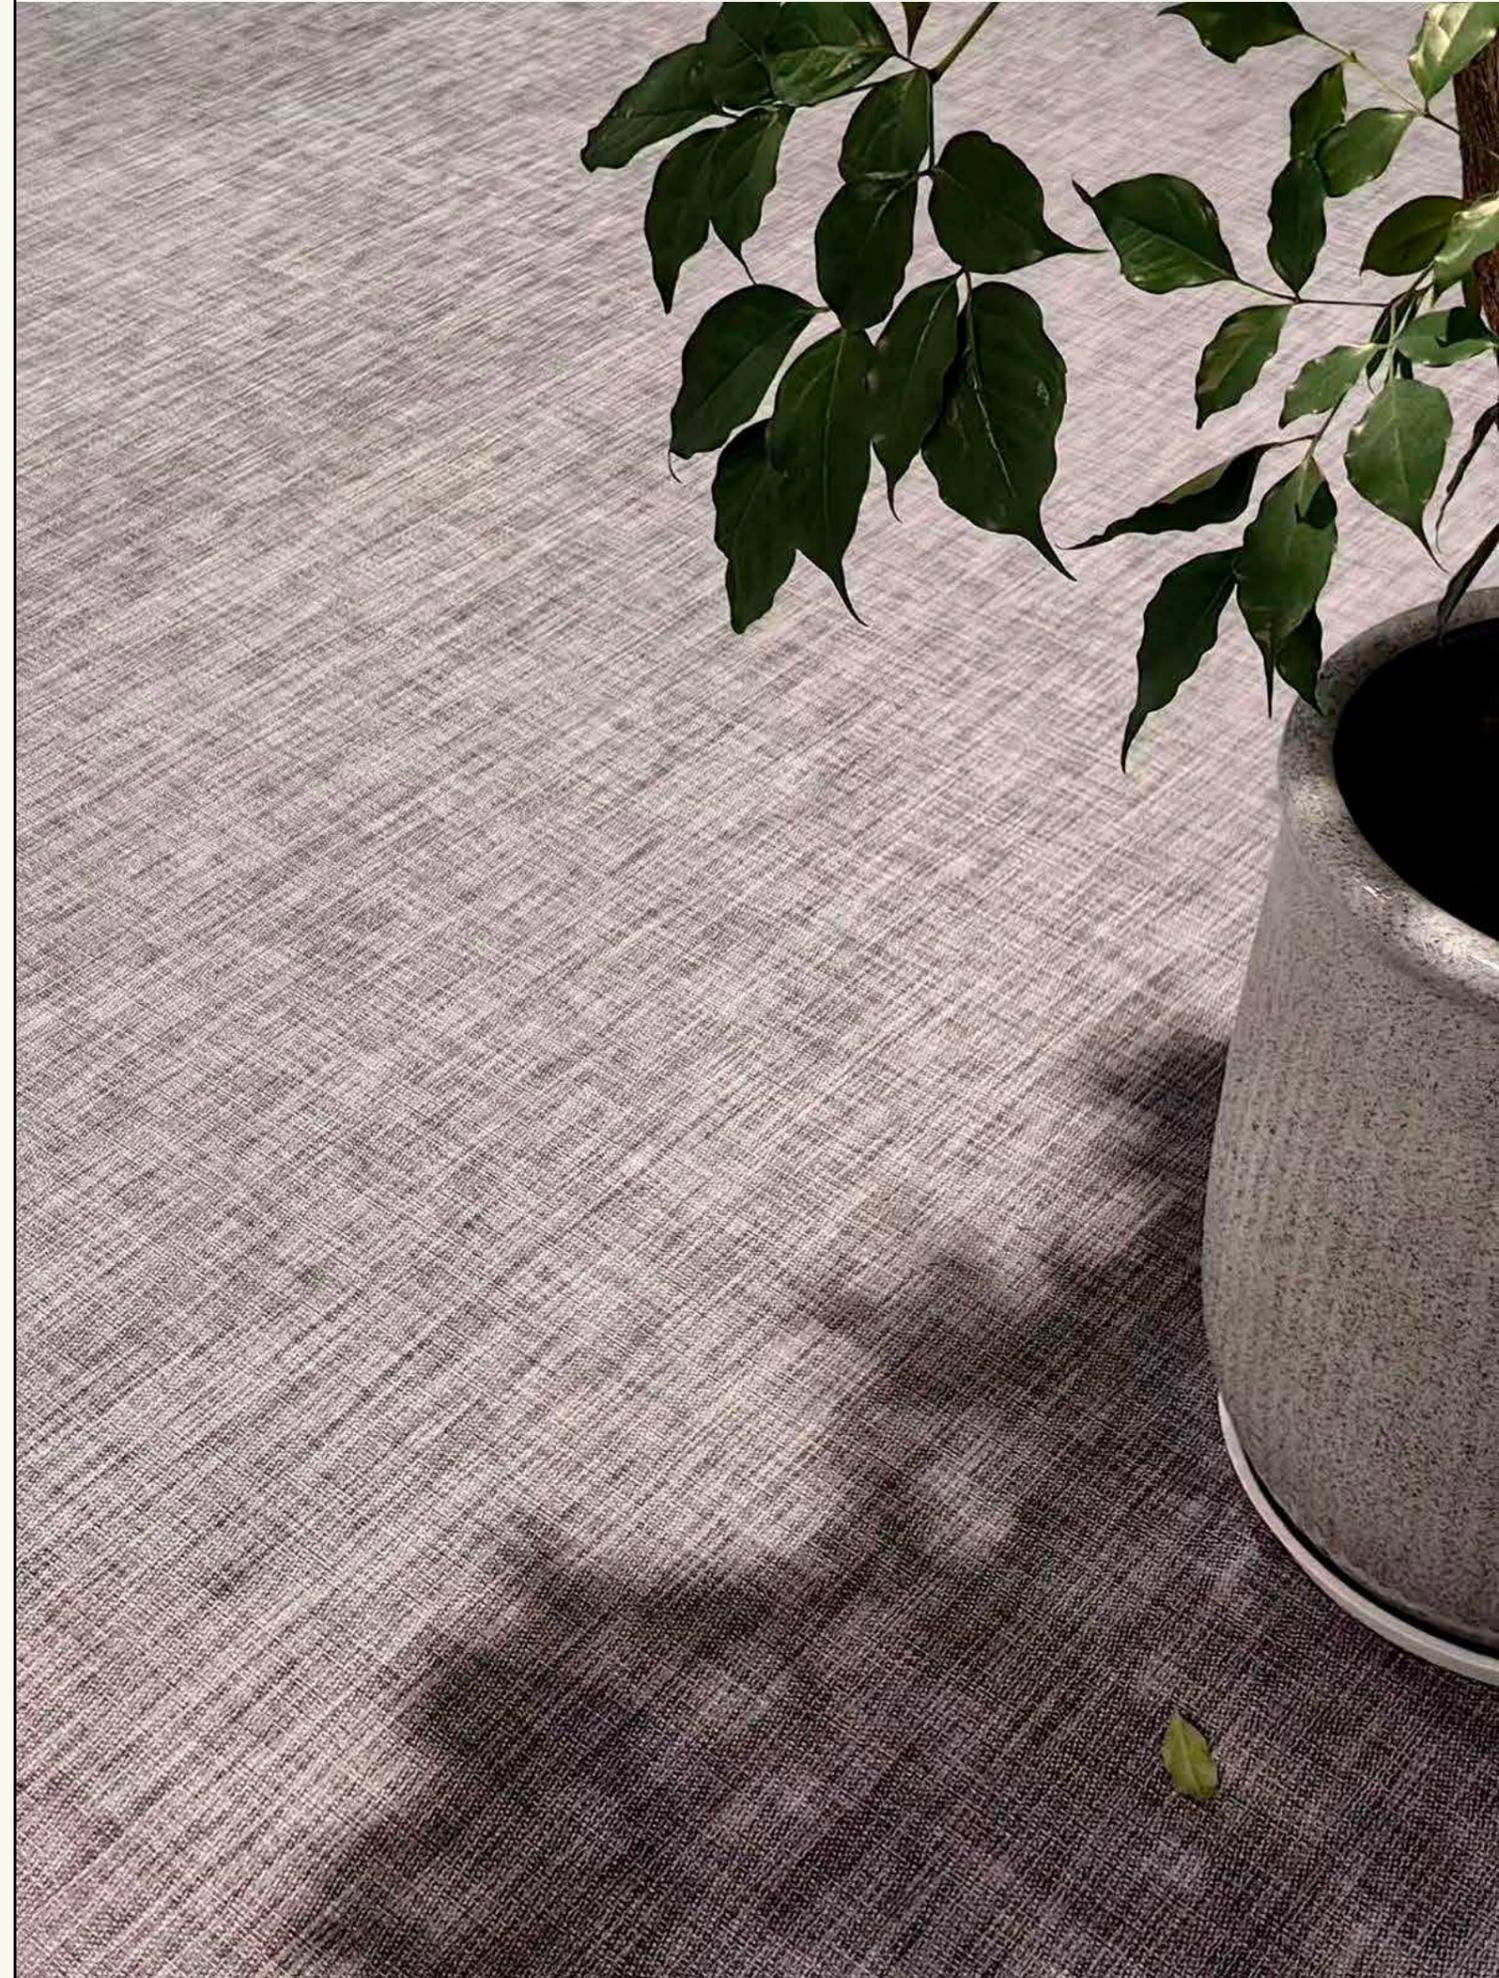



Delux
21004



Delux
21012




Delux
21013




Delux
21046



Delux
21049

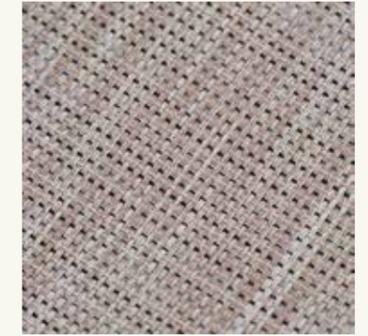

Delux
21055



Delux
21019



Delux
21022




Delux
21023



Delux
21060



Delux
21065

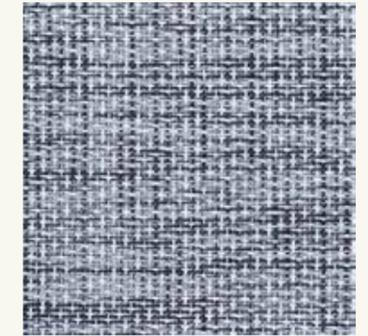

Delux
21066




Delux
21025



Delux
21031



Delux
21042




Delux
21068



Delux
22011



Delux
22013



Delux
22014




Delux
22015




Delux
22016



Delux
44029



Delux
44039

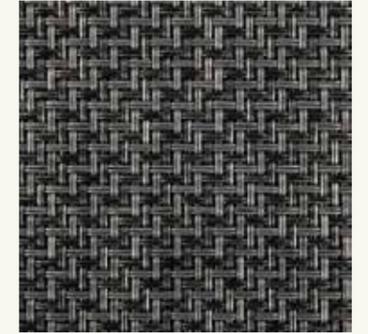

Delux
22028



Delux
22024



Delux
22026



Delux
31004



Delux
22029



Delux
44010



Delux
44013




Delux
44014




Elegant

— Elegant

WOVEN COLLECTION

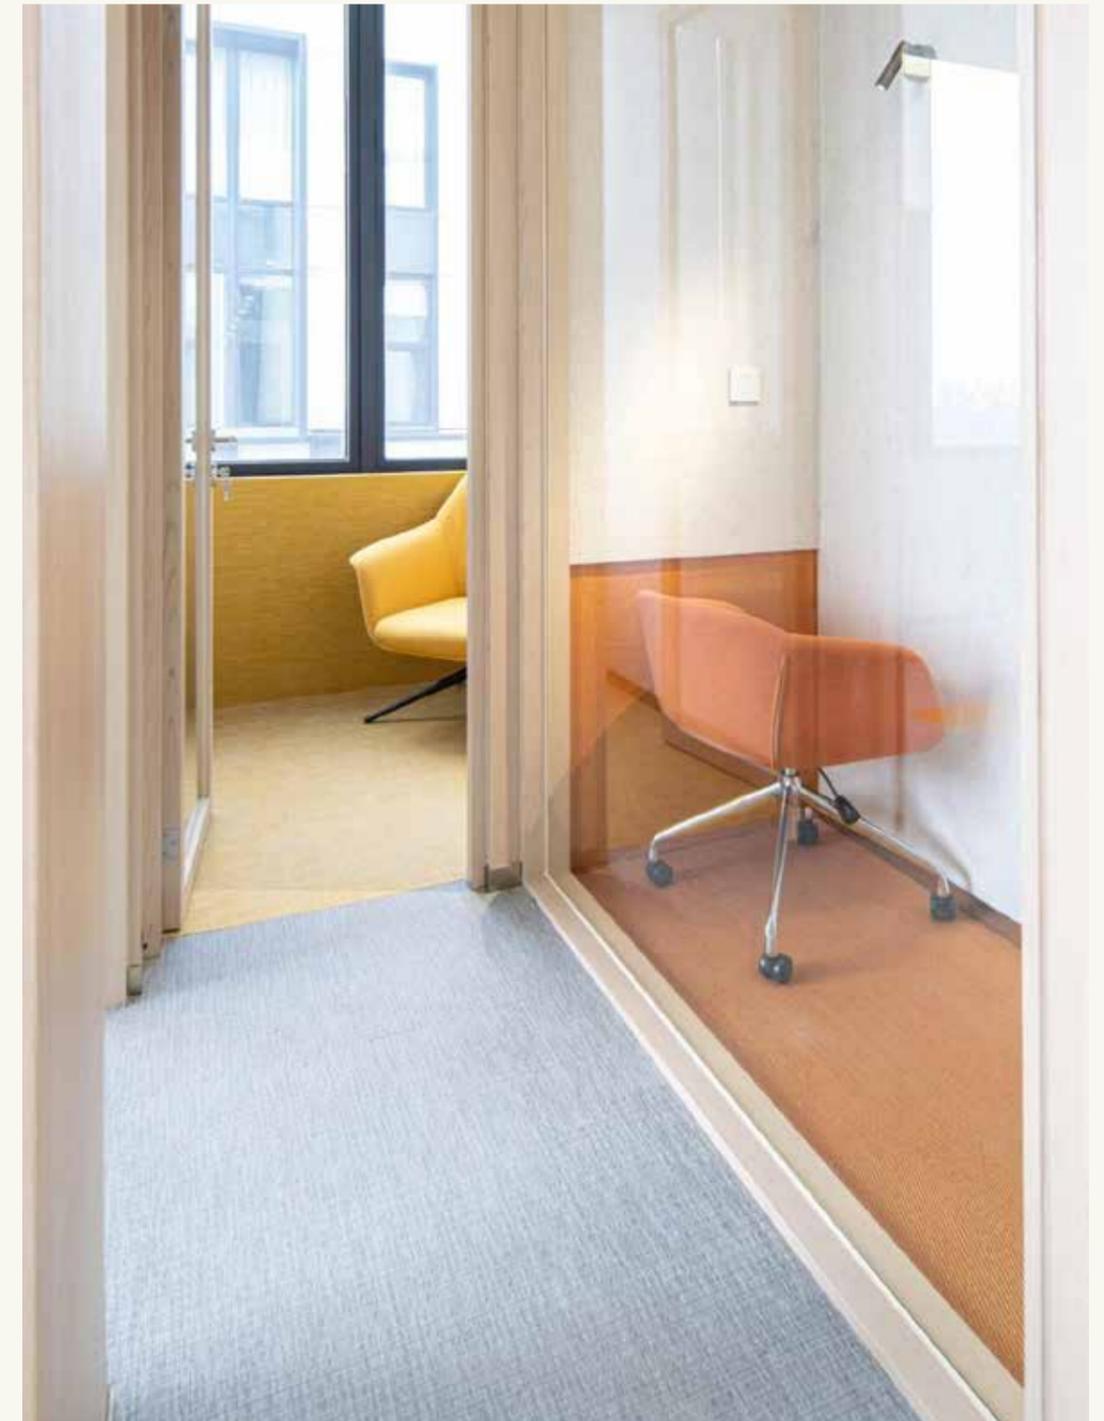




Elegant
51002




Elegant
51008-1




Elegant
51013




Elegant
52004



Elegant
52008

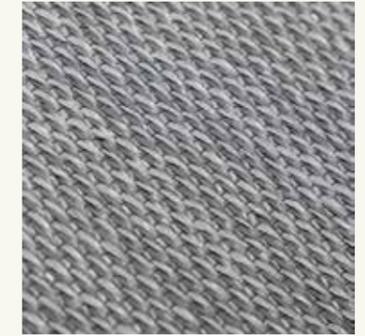


Elegant
52015




Elegant
51018




Elegant
51028



Elegant
51033



Elegant
52021



Elegant
52022



Elegant
52037-1




Elegant
52001



Elegant
52002



Elegant
52003



Elegant
52056-1



Elegant
511007




Elegant
511012






— Fantasy


WOVEN COLLECTION



Fantasy
6001




Fantasy
6002




Fantasy
6003




Fantasy
6046



Fantasy
108047

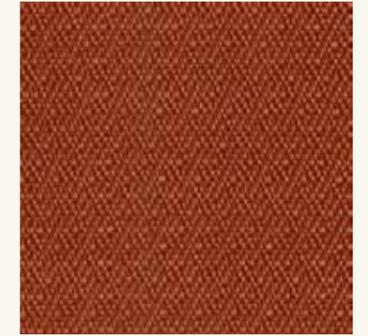


Fantasy
108053




Fantasy
6017-4




Fantasy
6027



Fantasy
6028



Fantasy
6047



Fantasy
6040



Fantasy
6036



Fantasy
6038




Fantasy
6033




— Stairs

WOVEN COLLECTION

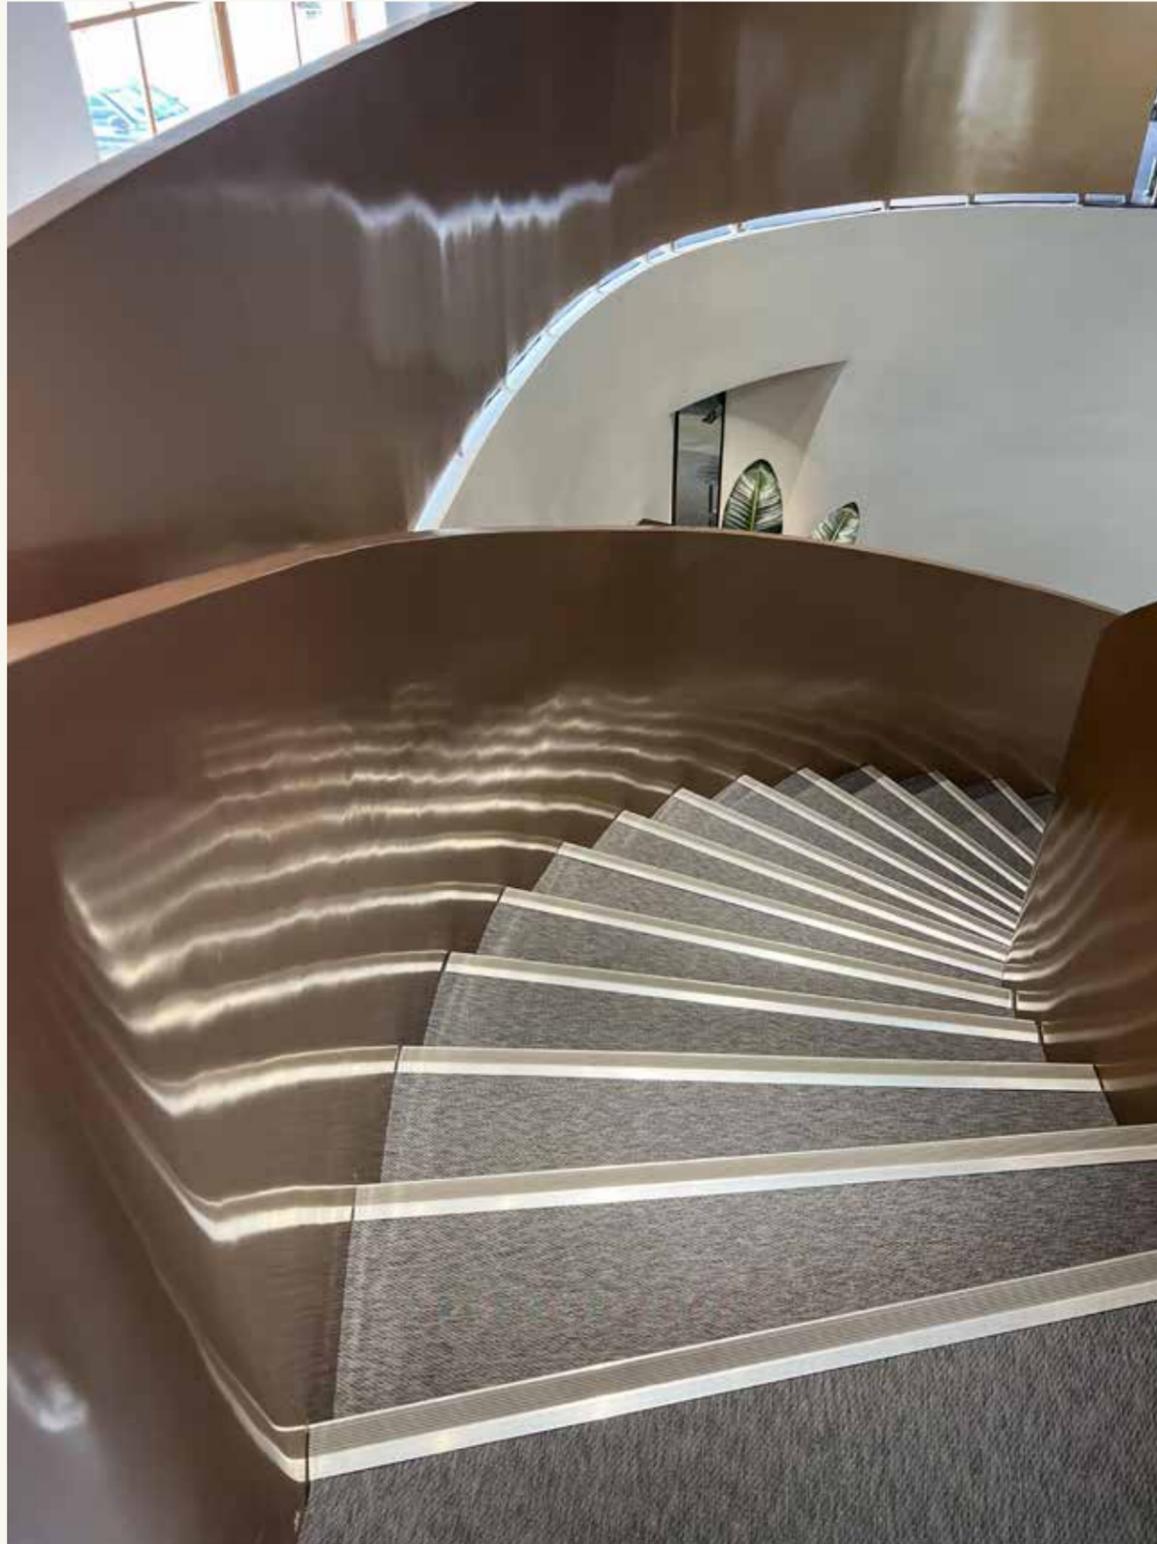

Stairs

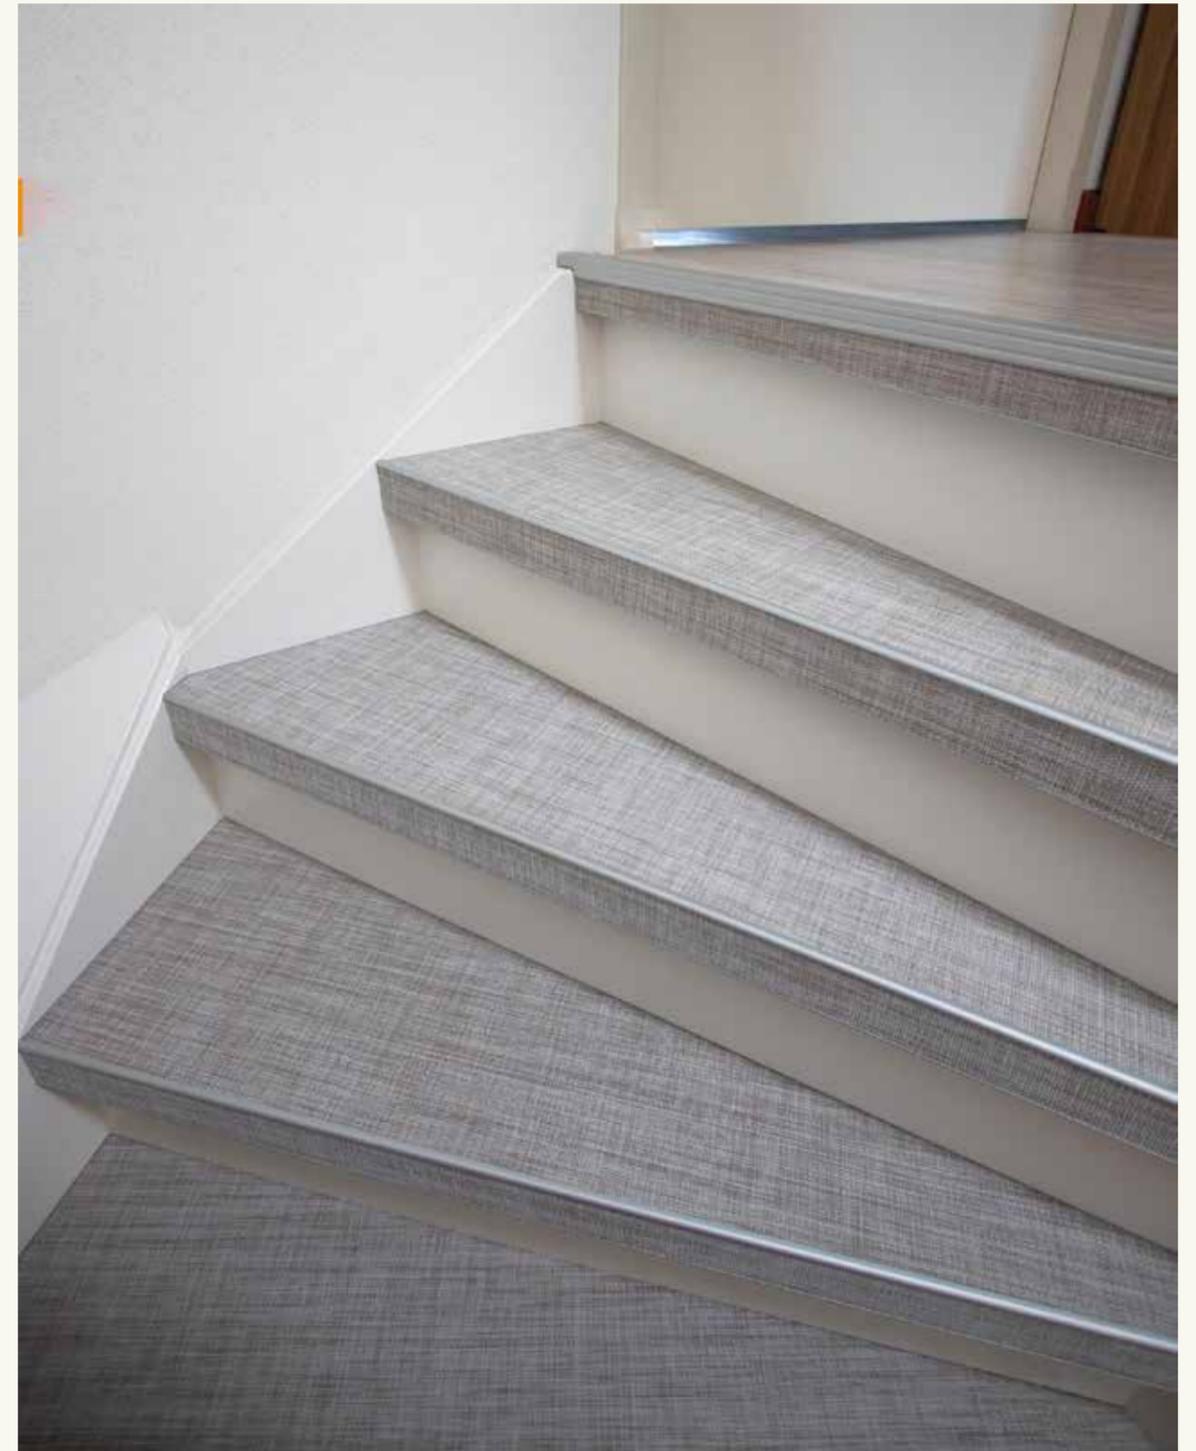

Stairs —

WALL COVERING

SPECIFICATIONS

Construction

CONSTRUCTION	2-layer
WEAR LAYER	1mm PVC Woven Layer
CORE	Fiberglass(PVC Core Optional)
JOINT PROFILE	Direct Stick with Werner Müller Type A PVC Cold-Welding Liquid
EDGE PROFILE	Square Edge
Adhesive	Thomsit K188E, Uzin KE 2000S

Characteristics

SURFACE FINISHED TYPE	Prefinished
SURFACE SHEEN LEVEL	Matte
WARRANTY	Twelve(12) Year

CERTIFICATIONS

Accreditations

FIRE TEST	Bfl-S1
DRY FLOOR FRICTION TEST	Classification P3
FORMALDEHYDE EMISSIONS	E0
E3 APPROVED	Yes
SUSTAINABILITY	Sustainably Sourced & Manufactured
CE REACH	Yes

ROLLS & TILES

Technical Specifications	Standard	Roll	Tile
 COMPOSITION	—	Vinyl + Fiberglass Core (PVC Core Optional)	Vinyl + Fiberglass Core (PVC Core Optional)
 WEIGHT	ISO 8543	4000 g/m ²	4000 g/m ²
 THICKNESS	ISO 1765	2.5 mm	2.5 mm
 LIGHT FASTNESS	EN ISO 105-B02	≥ 6	≥ 6
 DIMENSION STABILITY	EN 986 ISO 2551	≤ 0.05%	≤ 0.05%
 CASTOR CHAIR SUITABILITY	EN 985:2002	Intensive Use	Intensive Use
 SOUND INSULATION	ISO 10140	15dB / 19dB	15dB / 19dB
 THERMAL RESISTANCE	ISO 8302	Suitable for Underfloor Heating	Suitable for Underfloor Heating
 STATIC ELECTRICITY	ISO 6356	≤ 2KV	≤ 2KV
 SLIP RESISTANCE	EN13893	P3	P3
 REACTION TO FIRE	EN 13501-1	Bfl-S1	Bfl-S1
 ROLL WIDTH	—	200 cm	—
 ROLL LENGTH	—	2000 cm	—
 TILE DIMENSION	—	—	50 cm x 50 cm
 CE CERTIFICATE	EN 14041	ICR/VC/HB250801	ICR/VC/HB250801
 LEVEL OF USE	EN 1307:2014	Class 33	Class 33

All specifications are based on average values and may deviate. The values are for guidance and are not contractual. Subject to technical modifications.

ENVIRONMENT



[W] SUMBRA.CO

[M] 86-198-8317-9548

[E] SALES@SUMBRA.CO

sumbra